




SQUARE COLUMN WRAP INSTALLATION INSTRUCTIONS



Step #1: Layout all pieces before starting installation to ensure the panel sizes and specific pieces are correct. There should be 8 pieces in total (4 corners & 4 flats).

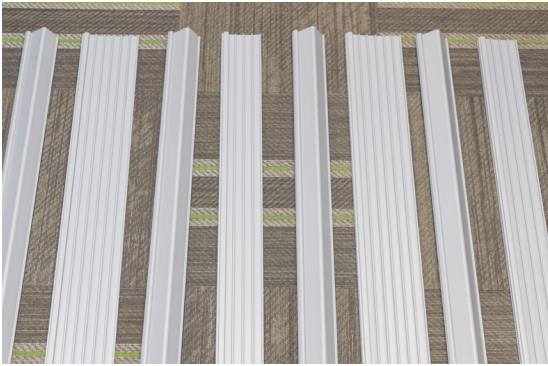

Step #2: To start, place the first corner panel in place and slide down the flat panel, interlocking the sections.



Step #3: Once set, add the next corner panel in place by sliding it down to interlock with the already installed flat panel.

Ph: (866) 825-8659

Fax: (313) 842-7860

www.idealshield.com

Email: info@idealshield.com

2525 Clark St - Detroit, MI 48209





SQUARE COLUMN WRAP INSTALLATION INSTRUCTIONS



Step #4: Continue these steps by adding the next flat panel, then corner panel, and so on until the entire column is wrapped.



Step #5: Once all panels are locked into place, the Square Column Wrap is complete.



**Visit the Ideal Shield Youtube
Channel for video installation**

Ph: (866) 825-8659
Fax: (313) 842-7860
www.idealshield.com
Email: info@idealshield.com
2525 Clark St - Detroit, MI 48209