


6" x 6" x 3/8"  
CHAMFERED FLANGE WELDED  
IN PLACE




ø8"-10" CORE HOLE

3" STEEL CORE SLEEVE

CONCRETE FILL


2 1/2" Sch. 80 PIPE

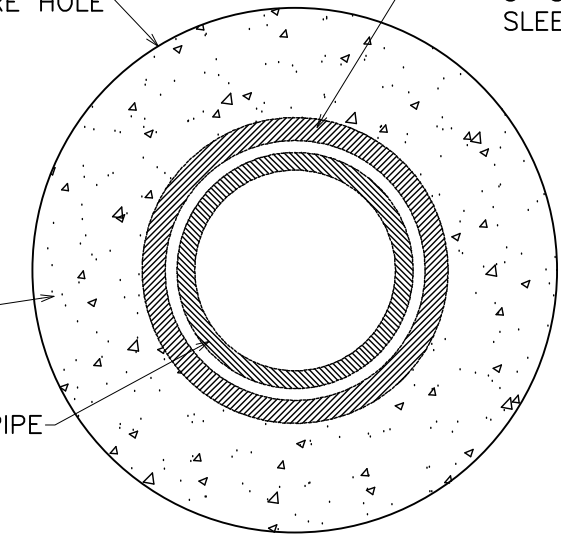

SPECIFIED LENGTH


4" SCH 40 RAILS w/  
5.25" OD PLASTIC

2-1/2" SCH 80 POSTS w/  
3.25" OD PLASTIC

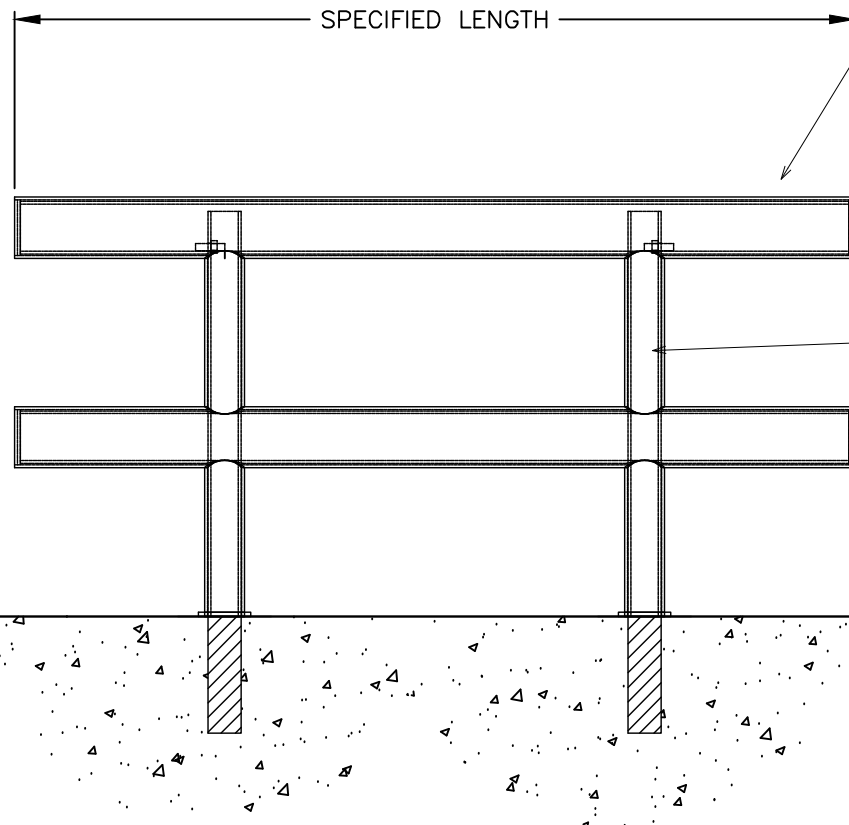

SPECIFIED HEIGHT

2' RECOMMENDED CORE  
DEPTH

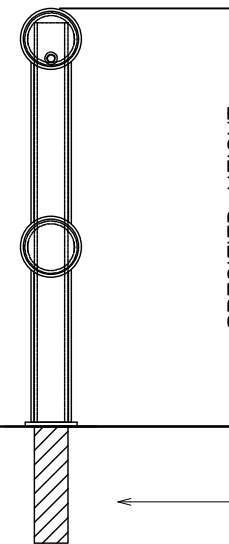

THIS DRAWING AND ALL THE INFORMATION THEREON IS THE PROPERTY OF THE IDEAL SHIELD, IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC, NOR COPIED, NOR USED, TO THE DISADVANTAGE OF SAID IDEAL SHIELD AND IS SUBJECT TO RETURN ON DEMAND.

COPYRIGHT 2019, IDEAL SHIELD®

| NO. | REVISIONS | DATE | APPROVED |
|-----|-----------|------|----------|
|     |           |      |          |
|     |           |      |          |
|     |           |      |          |
|     |           |      |          |
|     |           |      |          |
|     |           |      |          |



2525 Clark St.  
Detroit, MI 48209

PROJECT

CUSTOMER

DESCRIPTION

IDEAL SHIELD  
STANDARD GUARDRAIL  
CORED

DRAWN BY:

GCC

APPROVED BY:

DATE: 1/1/2019

PROJECT NO.:

SGR1

SCALE:

FINISH:

HDPE PLASTIC

DRAWING NO.:

1

MATERIAL:

STEEL & HDPE

SHEET

1 OF 1