PYRAMID SIGN BASE

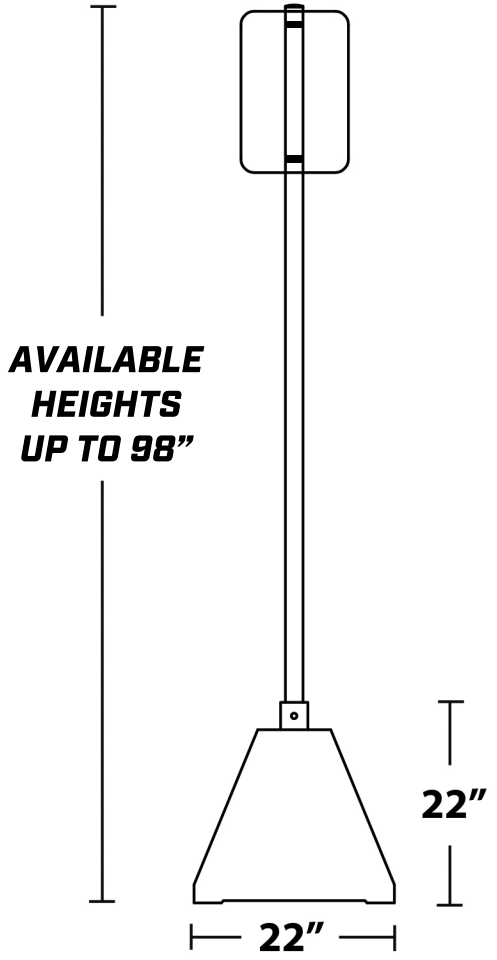

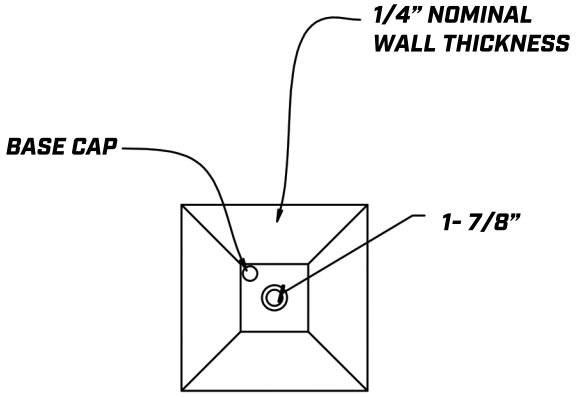

TOP VIEW

ADD ONS

BOTH AVAILABLE UPON REQUEST

SIGN BRACKETS

WHEELS

SPECFICATIONS

SIGN BASE MATERIAL:
- 1/4” NOMINAL WALL THICKNESS
- LOW-DENSITY POLYETHYLENE THERMOPLASTIC WITH
- ULTRA-VIOLET & ANTI-STATIC ADDITIVES

SIGN POST MATERIAL:
- SIGN HOLES CAN BE FIELD DRILLED OR ADD SIGN BRACKETS FOR AN EASY ADJUSTABLE INSTALLATION
- 1.66 OD 14 GAUGE STEEL SLEEVE IN HDPE PLASTIC
- 1.9” OD WITH PLASTIC CAP

SIGN BASE DIMENSIONS:
- 22” H X 22” W X 22” D

WEIGHT:
- 30 IBS. WITH POLE WHEN EMPTY
- 175 IBS.+ WHEN FILLED

COLORS:
- STANDARD COLORS: OSHA YELLOW, BLUE, OR RED
- CUSTOM COLORS AVAILABLE

HEIGHT:
- STANDARD HEIGHT IS 98” WITH OR WITHOUT WHEELS

INSTALLATION:
- FILL WITH CONCRETE, SAND OR WATER
- CAN HOLD UP TO 250 IBS. OF SAND OR GRAVEL
- UP TO 22 GALLONS OF WATER
- ONLY USE 16 GALLONS OF WATER IN FREEZING TEMPS

WWW.IDEALSHIELD.COM • (866) 825-8659• PLEASE SUBMIT YOUR PRODUCT INQUIRY TO INFO@IDEALSHIELD.COM

NO.	REVISIONS	DATE	APPROVED

2525 Clark St.
Detroit, MI 48209

PROJECT	CUSTOMER	DESCRIPTION	DRAWN BY	APPROVED BY	DATE
		PYRAMID SIGN BASE	GCC		

PROJECT NO.: —
SCALE:
FINISH:
DRAWING NO.:
MATERIAL:
SHEET 1 OF 1