



SIGN BASE FILL INSTRUCTIONS

Step #1: Move Sign Base to designated location before filling.

Step #2: Remove cap from top of Sign Base and fill with chosen filler based on your stability needs.

2a: Water: 16 gallons in areas where temperatures freeze, otherwise fill to the top (19 gallons).

2b: Base Gel & Water Mixture: 16 gallons (in freezing temps) or 19 gallons of water otherwise. Used to prevent evaporation or leakage if tipped over. Ignore install instructions on base gel package, follow our filling limits in freeze areas.


2c. Pea Gravel: make sure signpost is installed before filling, use large funnel for easier install. (4-5 50lb bags of pea gravel)

2d. Sand: make sure signpost is installed before filling, use large funnel for easier install. (4-5 50lb bags of sand)

2e. Concrete: make sure signpost is installed before filling, use large funnel for easier install.

Step #3: Once filled, replace cap on top of the sign base.

***Sign size and filler option affects tip point.**

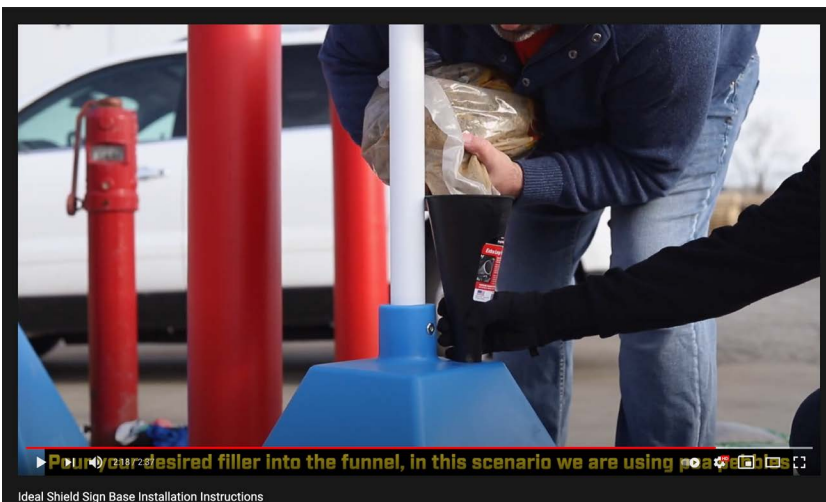

Visit the Ideal Shield Youtube Channel
for video installation



Ph: (866) 825-8659
Fax: (313) 842-7860
www.idealshield.com
Email: info@idealshield.com
2525 Clark St - Detroit, MI 48209