


BEA IS40P

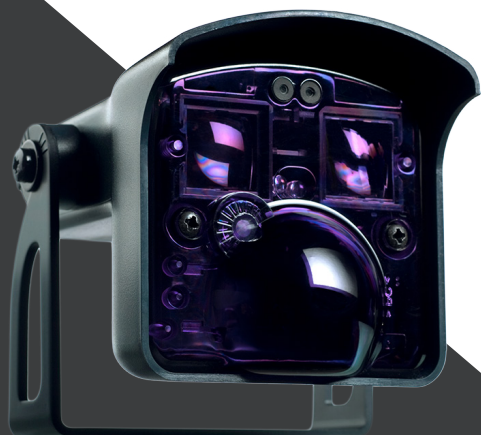

**FITS MOST
INDUSTRIAL
APPLICATIONS**

**RELIABLE
PRESENCE
DETECTION**

**WITHSTANDS
HARSH
ENVIRONMENTS**

BEA's IS40P is an infrared presence sensor designed for use in industrial applications. This sensor utilizes 40 active infrared spots for reliable presence detection.

- **ADJUSTABLE LEARN TIME**

Nine unique infrared patterns capable of highly flexible presence detection in any industrial environment

- **REDUCE FALSE DETECTIONS**


Six modes of detection filtering are available for microwave immunity, as well as pedestrian and parallel traffic rejection

- **EASY TO PROGRAM**


Adjustable infrared immunity modes mitigate environmental disturbances such as subtle door vibrations, light, sun, rain and snow

- **PROGRAMMABLE VIA REMOTE**

Remote control programming enables user to quickly and safely make changes from the ground (sold separately)

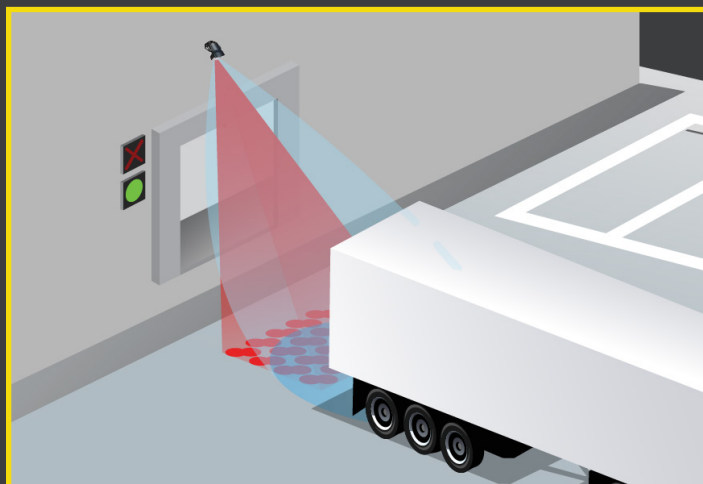

MORE APPLICATIONS

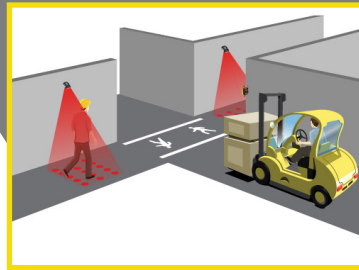

TECHNICAL SPECIFICATIONS

TECHNOLOGY	Active Infrared
DETECTION MODE	Presence
MAINS FREQUENCY	50 - 60 Hz
POWER CONSUMPTION	<3.5 W
OUTPUT	2 Relays (free of potential change-over contact)
MAX. CONTACT VOLTAGE	42 VAC/VDC
MAX. CONTACT CURRENT	1 A (resistive)
MAX. SWITCHING POWER	30 W (DC) / 48 VA (AC)
SUPPLY VOLTAGE	12 - 24 VAC; ± 10% 12 - 24 VDC; 10% / -3%
TEMPERATURE RANGE	-22 - 140 °F
TILT	15 - 45°
TRANSMITTER FREQUENCY / WAVELENGTH	875 nm
TRANSMITTER POWER DENSITY	< 250 mW / m ²
DETECTION FIELD	10' x 10' @ max. mounting height of 16' (*emitting spots)
OUTPUT HOLD TIME	0.5 s
MIN. DETECTION SPEED	0 in / s to activate detection
REACTION TIME	250 ms
MOUNTING HEIGHT	8' - 16'
HUMIDITY	0 - 95% non-condensing
WEIGHT	14 oz
DIMENSIONS	3 4/5" (W) x 4" (H) x 5" (D)
MATERIAL	ABS & Polycarbonate
CABLE LENGTH	32'
DEGREE OF PROTECTION	IP65
NORM CONFORMITY	EMC: 2004 / 108 / EC R&TTE: 1999 / 5 / EC

*Zone detected by Spotfinder, i.e. slightly larger than actual detection field

PRODUCT SERIES



10IS40P



10IS40



10REMOTE

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.